

DR-6030C

Production Scanner.

Compact A3 production scanner for dependable, high-quality scanning.

you can



imageFORMULA

**Canon**

To find out more or request a quotation, please contact:

ePartner Consulting, St Ann's House, Guildford Road, Lightwater, Surrey, GU18 5RA, UK.  
T. 0844 567 2000. E. sales@epc.co.uk. W. www.epc.co.uk





# High speed A3 scanning performance with impressive paper handling and reliability.

Compact and ergonomically-designed, the imageFORMULA DR-6030C scanner speeds up workflow and boosts productivity with unrivalled paper handling reliability.

## Exceptional speed and efficiency

Busy working environments can quickly raise productivity with the DR-6030C's rapid colour scanning. Speeds of up to 80 pages per minute in landscape mode (60ppm in portrait) are achieved through Canon's advanced 3-line CMOS CIS sensor technology and JPEG-compression image file transfer process.

## Advanced processing for superior image quality

The versatile DR-6030C has an optical resolution of 600dpi. It uses the latest image-processing technology to create consistent high-quality results. 3-Dimensional Colour Correction delivers unprecedented colour reproduction, using a built-in colour circuit to identify the exact RGB colours used.

Together with Auto Colour Detection these features ensure your documents are accurately colour-matched to the originals, for high quality reproduction.

The DR-6030C also comes with three text enhancement modes – Advanced Text Enhancement, Advanced Text Enhancement II and High Speed Text Enhancement. All three are designed to improve readability and extract text from hard-to-read originals, such as documents with highlighted notes, light-coloured text or documents with dark patterned backgrounds.

Customised Colour Dropout provides the ability to remove unwanted colour graphics, including lines and boxes, from the final image. This gives clearer images, resulting in improved OCR reading accuracy and reduced file size, which is particularly useful in form

processing. Intelligent scanning functions, such as Auto Size Detection, Deskew, Skip Blank Page, Text Orientation Recognition and Hole Punch Removal, will ensure that documents are professionally captured every time.

## Compact by design

One of the most compact A3 production scanners in its class, the DR-6030C can be easily positioned on desktops in corporate office departments or remote offices – where space could be limited. Scan operators will greatly appreciate the front document feed and exit design for its space-saving and convenient operation. Up to 100 scan jobs or individual document workflows can be pre-configured for quick initiation, as well as more efficient document capturing and processing.



## Customised Colour Dropout

Select a colour range to remove unwanted elements from scanned image





**B&W  
SPEED**  
60ppm



**COLOUR  
SPEED**  
60ppm



**DAILY DUTY  
CYCLE**  
10,000 scans/day



**AUTOMATIC  
DOCUMENT FEEDER**  
100 sheets



### Trouble-free paper handling

The DR-6030C can reliably handle up to 10,000 scans a day and is capable of supporting the most demanding environments. The high precision roller system allows for jam-free feeding of a wide range of documents, from A3 media and plastic cards to documents of up to 3m in length. The selectable straight paper path allows scanning of very thick documents and multi-sheet (up to 546 g/m<sup>2</sup>).

### Leading energy efficiency

The most energy-efficient production scanner in its class, the DR-6030C uses just 46W of power when scanning – saving you money and helping you become more eco-friendly.

### Powerful software

The flexibility and versatility of the DR-6030C is enhanced with software to help meet all your business needs.

**CapturePerfect** – batch scan documents quickly and easily with this intuitive application that offers multi-window and thumbnail views. A CapturePerfect Software Development Kit (SDK) is also available for easy development of customised scanning applications that fit with your specific workflow and business requirements.


**Kofax Virtual ReScan** – delivers excellent image quality scan-after-scan. Scanning is simpler and easier thanks to automatic image processing and document handling.

Industry-leading quality imaging improves readability and raises OCR recognition rates, so fewer re-scans are required. You save time and money, while significantly increasing productivity.

### Extend the Possibilities

For the ultimate in versatile scanning solutions, the optional Flatbed Scanner Unit 101 is the DR-6030C's perfect partner. Easily attached via USB cable, it is designed to work seamlessly with the DR-6030C. A unique ambient light cancellation feature allows continuous 'open cover scanning' to help speed-up processing, while a precision 1200dpi sensor ensures superior image quality from all scanned originals.

### Selectable Paper Path

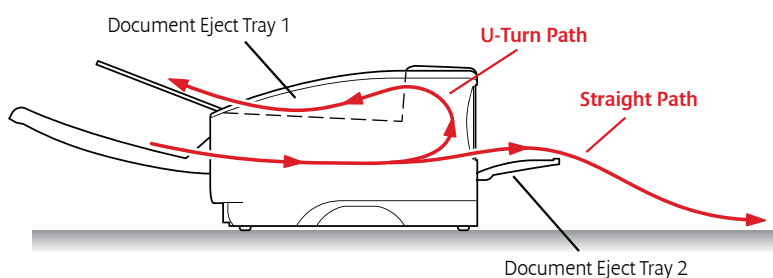

Optional Flatbed  
Scanner Unit 101



# Specifications for imageFORMULA DR-6030C

|                                 |   |   |   |   |
|---------------------------------|---|---|---|---|
| Type                            | Desktop Type Sheet Fed Scanner  |   |   |   |
| Document Reading Sensor         | CMOS CIS 3 Line Sensor  |   |   |   |
| Optical Resolution              | 600dpi  |   |   |   |
| Light Source                    | RGB LED   |   |   |   |
| Reading Side                    | Front/Back/Duplex   |   |   |   |
| Interface                       | High Speed USB 2.0 & SCSI-3   |   |   |   |
| Dimensions                      | Tray closed: 398 (W) x 312 (D) x 191 (H) mm<br>Tray opened: 398 (W) x 668 (D) x 194 (H) mm at U-turn path |   |   |   |
| Weight                          | Approx. 10.5 Kg   |   |   |   |
| Power Requirements              | AC 220 - 240V (50/60Hz)   |   |   |   |
| Power Consumption               | Scanning: 46.5W, Sleep Mode: 3.7W   |   |   |   |
| Operating Environment           | 10 - 32.5°C (50 - 90.5°F), Humidity: 20 - 80% RH  |   |   |   |
| Environmental Compliance        | RoHS and ENERGY STAR  |   |   |   |
| <b>READING SPEED*</b>           |   | <b>A4, Portrait</b>                         | <b>A4, Landscape</b>                        |   |
|                                 | B&W/Greyscale   | 200dpi                                      | 60ppm/120ipm                                |   |
|                                 |   | 300dpi                                      | 60ppm/120ipm                                |   |
|                                 | Colour  | 200dpi                                      | 60ppm/120ipm                                |   |
| 300dpi                          |   | 60ppm/80ipm                                 |   |   |
| <b>DOCUMENT SPECIFICATIONS</b>  | Width   | 53 - 300mm                                  |   |   |
|                                 | Length  | 70 - 432mm                                  |   |   |
|                                 | Thickness   |   | <b>U-turn Path</b>                          | <b>Straight Path</b>                        |
|                                 |   | Separation On                               | 52 - 128g/m <sup>2</sup><br>(0.06 - 0.15mm) | 52 - 128g/m <sup>2</sup><br>(0.06 - 0.15mm) |
| Separation Off<br>(Bypass Mode) | 42 - 157g/m <sup>2</sup><br>(0.05 - 0.20mm)   | 42 - 546g/m <sup>2</sup><br>(0.05 - 0.66mm) |   |   |

|   |   |
|---|---|
| International Standard Card   | Width: 53.9mm, Length: 85.5mm, Thickness: 0.76mm<br>(Embossed card not supported)   |
| Long Document Mode  | 3000mm Max (Selectable in MS Windows control panel)   |
| Paper Separation  | Retard Roller   |
| Feeder Capacity   | 100 sheets (80 g/m <sup>2</sup> )   |
| <b>OUTPUT</b>   |   |
| Resolution  | 100 x 100dpi, 150 x 150dpi, 200 x 200dpi, 240 x 240dpi,<br>300 x 300dpi, 400 x 400dpi, 600 x 600dpi   |
| Mode  | Black and White, Error Diffusion, Advanced Text Enhancement,<br>Advanced Text Enhancement II, High Speed Text Enhancement,<br>8-bit (256-level) Greyscale, 24-bit Color, Auto Color Detection   |
| <b>PRODUCT FEATURES</b>   | Deskew, Auto Page Size Detection, Skip Blank Page, Text Orientation<br>Recognition, Preset Gamma Curve, Colour Dropout (RGB/Custom<br>Colour) / Enhancement (RGB/Custom Colour), Erase Dot, Border<br>Removal, Punch Hole Removal, Batch Separation, Edge Enhancement,<br>Prescan, Scan Area Setting, MultiStream™, Patch Code, Separate Front/<br>Back settings, Ultrasonic Double Feed Detection, User Registration |
| <b>BUNDLED SOFTWARE</b>   | ISIS/TWAIN Drivers (Windows 2000/XP Pro/XP Home/Vista/7)<br>LINUX Drivers (web distribution only)<br>CapturePerfect 3.0<br>Kofax VRS Basic  |
| Options   | Flatbed Scanner Unit 101, Barcode Module III  |
| Consumables   | Exchange Roller Kit   |
| Suggested Daily Duty Cycle  | 10,000 scans/day  |
| * The scanning speed depends on the specification of PC and the setting of functions. Some images are simulated for clarity of reproduction. All data is based on Canon's standard testing methods. This leaflet and the specifications of the product have been developed prior to the date of product launch. Final specifications are subject to change without notice™ and © All company and/or product names are trademarks of their respective manufacturers in their markets and/or countries. |   |

# Specifications for Optional Flatbed Scanner Unit 101

|  |   |                                 |           |
|--|---|---------------------------------|-----------|
| Type   | Desktop A4 Flatbed Scanner Option   |                                 |           |
| Document Reading Sensor                            | CCD Sensor  |                                 |           |
| Optical Resolution                                 | 1200dpi   |                                 |           |
| Light Source                                       | RGB LED   |                                 |           |
| Reading Side                                       | Front   |                                 |           |
| Interface  | High speed USB 2.0  |                                 |           |
| Dimensions   | 290 (W) x 513 (D) x 88.5 (H) mm   |                                 |           |
| Weight   | 3.5Kg (Without AC Adapter)  |                                 |           |
| Power Requirements                                 | DC 24V, 2.2 A   |                                 |           |
| Power Consumption                                  | Scanning: 15.2W, Sleep Mode: 5.1W,<br>Power Turned Off: Less than 0.5W  |                                 |           |
| Operating Environment                              | 10 - 32.5°C (50 - 90.5°F), Humidity: 20 - 80% RH  |                                 |           |
| Environmental Compliance                           | RoHS and ENERGY STAR  |                                 |           |
| <b>READING SPEED<sup>1</sup></b><br>(A4, Portrait) | B & W/Greyscale<br>Colour   | <b>Flatbed Scanner Unit 101</b> |           |
|  |   | 200/300dpi                      | 3 seconds |
|  |   | 200dpi                          | 3 seconds |
|  |   | 300dpi                          | 4 seconds |
| <b>DOCUMENT SPECIFICATIONS</b>                     | Width   | Up to 215.9mm (up to Legal)     |           |
|  | Length  | Up to 355.6mm (up to Legal)     |           |
| <b>PRODUCT FEATURES</b>                            | Size Detection Area, Ambient Light Cancelling Mode (Inherits image processing function from connected DR-series scanners) |                                 |           |

<sup>1</sup> The scanning speed depends on the specification of PC and the setting of functions. Some images are simulated for clarity of reproduction. All data is based on Canon's standard testing methods. This leaflet and the specifications of the product have been developed prior to the date of product launch. Final specifications are subject to change without notice™ and © All company and/or product names are trademarks of their respective manufacturers in their markets and/or countries.



To find out more or request a quotation, please contact:

ePartner Consulting Ltd  
St Ann's House  
Guildford Road  
Lightwater  
Surrey  
GU18 5RA

T. 0844 567 2000  
E. sales@epc.co.uk  
W. www.epc.co.uk

Canon Electronics Inc  
canon.com

Canon Europe  
canon-europe.com

English Edition  
© Canon Europa N.V.,  
2010

Canon Europe Ltd  
3 The Square  
Stockley Park  
Uxbridge  
Middlesex  
UB11 1ET  
United Kingdom